



Proline Trailers

Grain and Silage

Bale



Quality new and used
stock available online

07734 559 696

paul@pksales.co.uk

www.pksales.co.uk

PK Sales

Trailers

GRAIN AND SILAGE BALE

Paul Kelloway has a passion for quality and value when it comes to agricultural machinery. Learning his trade at the family manufacturing business, Paul now supplies both the UK and overseas markets with a broad range of new and second-hand manure and muck spreaders as well as dump, flatbed, grain and silage trailers.

Having a full understanding from design, through manufacture and out into the field Paul and the team at PK Sales can offer you the right product at the right price.

Visit our website to review our stock lists, or for updates on used equipment follow the team on Facebook.



GRAIN - PAGE 5



SILAGE - PAGE 5



BALE - PAGE 7

Proline

Grain and Silage Trailers

MODELS AVAILABLE
14, 16 AND 18 TONNES

The PK Sales Proline range features high specifications as standard making it the ideal transport solution for farmers and contractors who are looking at future agricultural haulage solutions. Currently available in the capacity of 14, 16 and 18 tonnes. Also with a range of optional extras, this trailer is ideal for silage, grain, woodchip and waste haulage suitable for daily use on the farm or in an industrial environment.

The key to PK Sales's Proline success is based upon safety and reliability. The chassis and running gear have been designed to provide maximum stability and the very best of on and off road handling characteristics as demanded by today's high speed tractors. The safety aspect continues in to the axle and braking areas of the Proline trailer where the highest specification axles and brakes are fitted to ensure that the trailer is capable of stopping safely in all conditions.

An evolution of the well established Proline range of tipping trailers, the new Proline Curve retains market leading high specification build quality combined with improved materials and enhanced manufacturing techniques.

Available in a range of capacities from 14 – 18 tonnes, complete with a wide range of useful optional extras to satisfy individual requirements, PK Sales are confident that the reliable and durable Proline range will continue to set the standard for years to come, ensuring demand and second hand values remain high.



Standard features on all the Proline Grain and Silage trailers include a number plate holder, a manual handbrake, chromed rams, a skid and skid carrier, steel mud flaps (with bolt-on front and rear steel including rubber spray flaps), LED road lights (including flashing

beacon and high tailgate lights), air brakes (including load sensing valve and bolt-on fixed hitch). The Proline Grain and Silage trailers are also shot blasted prior to a two pack paint finish with a choice of paint colour to finish.



CHASSIS

- Heavy-duty RHS chassis
- Fully welded construction
- Sprung drawbar with GKN fixed hitch on all models for an improved ride
- Twin tipping cylinders for ejecting the heaviest of loads



BODY

- Folded high tensile body panels formed from single sheets of steel for increased strength
- Hydraulic tailgate with six point locking system
- Mudguards and front/rear spray suppression flaps
- Front access ladder



RUNNING GEAR

- Commercial 120 mm square axles
- 10 stud 420 x 180 mm brake drums
- Multi leaf sprung axles with 2,000 mm track width for maximum stability
- Ratchet style handbrake



QUALITY

- Shot blasted paint preparation
- Finished with 130 microns of two pack acrylic paint



ANCILLARY EQUIPMENT

- LED lighting all round including twin rear light clusters, high tailgate repeater clusters, side markers and flashing beacon
- Bolt on rear light unit guards
- Removable drawbar skid with stowage point
- Front hose arm for convenient stowage of all hydraulic, air and electrical lines

Proline

Grain and Silage Trailers



Optional Equipment

The PK Sales Proline range of trailers are built to a high standard specification to suit the needs of modern farmers and contractors. In addition to the standard specification, PK Sales offers a wide range of manufacturer supplied and fitted options which can be specified to match the customer's exact requirements.

Silage sides are available 1000 mm height. 200 mm L/H & R/H and rear blower boards can also be supplied if needed.

Roll over sheets are available as either a water tight side to side or mesh front to rear system. The side to side is quickly removable and locates in the same attachment points as the silage sides, and is offered in a left or right hand stowage. This system also features a strapless cover for increased speed and ease of use. The front to rear system is hydraulically operated from the cab and features a solid or mesh sheet which is ideally suited for covering light/dusty products, whilst providing a rapid turn around time.

Air brakes with a load sensing valve can be fitted in addition to or in lieu of hydraulic brakes. ABS can also be optionally fitted to the air brake system for increased skid control.


Hydraulic brake load sensing valve is available to adjust the braking force in proportion to the trailer load.

Flotation wheels are available in variety of sizes and tread pattern in lieu of the standard 385/65 R22.5 wheel equipment.

Rear steering axle with forced or passive steering can be fitted to improve trailer manoeuvrability and reduce tyre scrubbing.

		MODEL					
		1400		1600		1800	
SPECIFICATIONS	Design capacity (kg)	14,000		16,000		18,000	
	Volume - Grain (m³)	19.0		21.4		24.2	
	Volume - Silage (m³)	31.7		35.7		40.3	
	Axle track width (mm)	2,000		2,000		2,000	
	Axle beam (mm)	120 × 120		120 × 120		120 × 120	
	Brake size (mm)	420 × 180		420 × 180		420 × 180	
	Axle springs - no. of leaves / leaf size (mm)	6 / 100 × 15		7 / 100 × 15		7 / 100 × 15	
	Tipping cylinders × capacity (l)	2 × 15.7		2 × 18.1		2 × 18.1	
	Floor thickness (mm)	5		5		5	
	Side thickness (mm)	4		4		4	
	Sprung drawbar	Std.		Std.		Std.	
	Front arch window	Std.		Std.		Std.	
	Fixed hitch	Std.		Std.		Std.	
	Standard wheels	385 / 65 R22.5		385 / 65 R22.5		385 / 65 R22.5	
		mm	ft	mm	ft	mm	ft
DIMENSIONS	[A] Overall length	7,190	23' 6"	7,870	25' 10"	8,690	28' 6"
	[B] Overall height - grain	2,715	8' 11"	2,868	9' 5"	2,868	9' 5"
	[C] Overall height - silage	3,715	12' 2"	3,868	12' 8"	3,868	12' 8"
	[D] Internal body length	5,500	18' 1"	6,200	20' 4"	7,000	23' 0"
	[E] Internal height - grain	1,500	4' 11"	1,500	4' 11"	1,500	4' 11"
	[F] Tipped height - grain	6,445	21' 1"	7,110	23' 4"	7,750	25' 5"
	[G] Tipped height - silage	7,020	23' 0"	7,685	25' 2"	8,325	27' 4"
	Average internal width	2,300	7' 6"	2,300	7' 6"	2,300	7' 6"
	Maximum external width	2,640	8' 8"	2,640	8' 8"	2,640	8' 8"
	Unladen weight - grain (kg)	5,445		5,845		6,200	
	Unladen weight - silage (kg)	5,795		6,245		6,650	

All dimensions based on 560/60 R22.5 wheel equipment
Dimensions in *italics* on 560/45 R22.5 wheel equipment

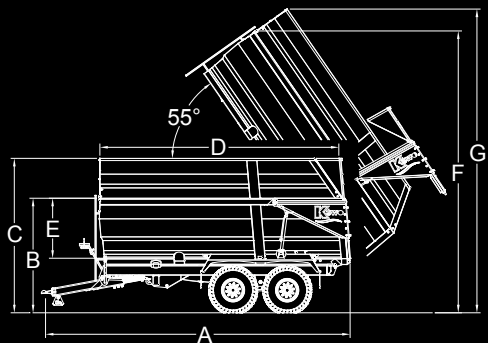

- 1000 mm Silage Sides
- 200 mm L/H & R/H Blower Boards
- 200 mm Rear Blower Board
- Sprung Drawbar
- Front bolt on Ladder with inside steps
- Swivel Hitch
- Spoon Hitch
- Rear Hitch & Electrics
- Rear Air Connections
- ABS Brakes
- 560/60 R22.5 BKT FL693M in lieu of Alliance Brand
- Welded Tool Tray
- Choice of paint colour as finish
- Reflective tape for road haulage



SILAGE SIDES



SWIVEL OR SPOON HITCH



REAR HITCH AND ELECTRICS



SPRUNG DRAWBAR



ABS BRAKES



LADDER AND STEPS

Proline

Bale Trailers

MODELS AVAILABLE
28 AND 32 FOOT

The PK Sales Bale trailer range features high specifications as standard making it the ideal transport solution for farmers and contractors who are looking at future agricultural haulage solutions. Currently available in 28 ft and 32 ft. Also with a range of optional extras, this trailer is ideal for bale haulage suitable for daily use on the farm or in an industrial environment.

Farmers and contractors looking to improve farm haulage and transport logistics need to look no further than PK Sales's Proline range of flat bed trailers. The Proline's ability to handle the daily transport needs of all farms with minimum downtime ensures that farmers and contractors can rely on a Proline trailer to safely transport a wide variety of products and waste materials as demanded, ensuring tight schedules can be met.

The key to PK Sales's Proline success is based upon safety and reliability. The chassis and running gear have been designed to provide maximum stability with the very best of on-and-off road handling characteristics as demanded by today's high speed tractors.

The safety aspect continues into the axle and braking areas of the Proline trailer where high specification axles and brakes are fitted to ensure that the trailer is capable of stopping safely in all conditions.

Available in a range of lengths from 26 – 32 ft, complete with a wide range of popular and useful options to satisfy individual requirements, PK Sales are confident that the reliable and durable Proline range will continue to set the standard for years to come, ensuring demand and second-hand values remain high.



Standard features on all the Proline Bale trailers include LED lighting equipment for maximum visibility at all times, commercial running gear with 10 stud 420 × 180 mm brakes for maximum braking efficiency, a sprung drawbar and axles on all models to give a stable yet smooth ride

quality as well as a low ride height to maximise the height of the load which the trailer can carry. The floor plate is checkered and front and rear bale raves are fitted as standard. The Proline Grain and Silage trailers are also shot blasted prior to a two pack paint finish.



CHASSIS

- Heavy-duty universal beam chassis
- Sprung drawbar
- Running gear optimally positioned to aid manoeuvrability



RUNNING GEAR

- Commercial 120 mm square axles
- 10 stud 420 × 180 mm brake drums
- Multi leaf sprung axles with 2,000 mm track width for maximum stability
- Ratchet style handbrake



QUALITY

- Shot blasted paint preparation
- Finished with 130 microns of two pack acrylic paint
- Bolt on fixed hitch
- Air / hydraulic brakes with air load sensing



FLOOR

- 4 mm chequer plate floor
- Rolled steel angle side channel for ease of attaching strap hooks
- RHS floor bearers spaced every 400 mm
- Rope hooks welded on to floor bearers



ANCILLARY EQUIPMENT

- LED lighting all round including side markers, rear lights and rear flashing beacon
- Bolt on rear light unit guards
- Removable drawbar skid with stowage point
- Bolt on steel mud flaps and bolt on rubber spray flaps

Proline

Bale Trailers




Optional Equipment

The PK Sales Proline range of trailers are built to a high standard specification to suit the needs of modern farmers and contractors. In addition to the standard specification, PK Sales offers a wide range of manufacturer supplied and fitted options which can be specified to match the customer’s exact requirements.



- Air only spring brakes in lieu hydraulic with load sensing
 - ABS Brakes
 - Hydraulic brake load sensing valve
- Swivel Hitch
 - Spoon Hitch
 - Rear flashing LED beacon
 - Tyre options available
- Choice of different bale raves
 - Strap box
 - Fixed drawbar
 - Ladder
- Wide or low wheel equipment
 - 4 ft extension

		MODEL			
		FB 28		FB 32	
SPECIFICATIONS	Bed length (mm / feet)	8,550 / 28'		9,750 / 32'	
	Design capacity (kg)	14,000		16,000	
	Axle track width (mm)	2,000		2,000	
	Axle beam (mm)	120 × 120		120 × 120	
	Brake size (mm)	420 × 180		420 × 180	
	Axle springs - no. of leaves / leaf size (mm)	6 / 100 × 15		6 / 100 × 15	
	Floor material	Checker plate		Checker plate	
	Floor bearer size (mm)	6 × 40 × 4		6 × 40 × 4	
	Floor bearer spacing (mm)	400		400	
	Chassis size (mm)	203 × 133 × 30 universal beam		203 × 203 × 46 column	
	Fixed drawbar	Std.		Std.	
	Swivel hitch	Std.		Std.	
	Standard wheels	385 / 65 R22.5		385 / 65 R22.5	
		mm	ft	mm	ft
DIMENSIONS	[A] Overall length	10,175	33' 4"	11,375	37' 4"
	[B] Bed height - 445/45 R19.5	1,040	3' 5"	1,040	3' 5"
	[B] Bed height - 560/45 R22.5	1,165	3' 10"	1,165	3' 10"
	[C] Front headboard height	610	2' 0"	610	2' 0"
	[D] Bale rave height	2,045	6' 8"	2,045	6' 8"
	[E] Drawbar / axle wheelbase	5,550	18' 2"	5,950	19' 6"
	Bed width	2,550	8' 4"	2,550	8' 4"
	Unladen weight (kg)	4,125		4,555	

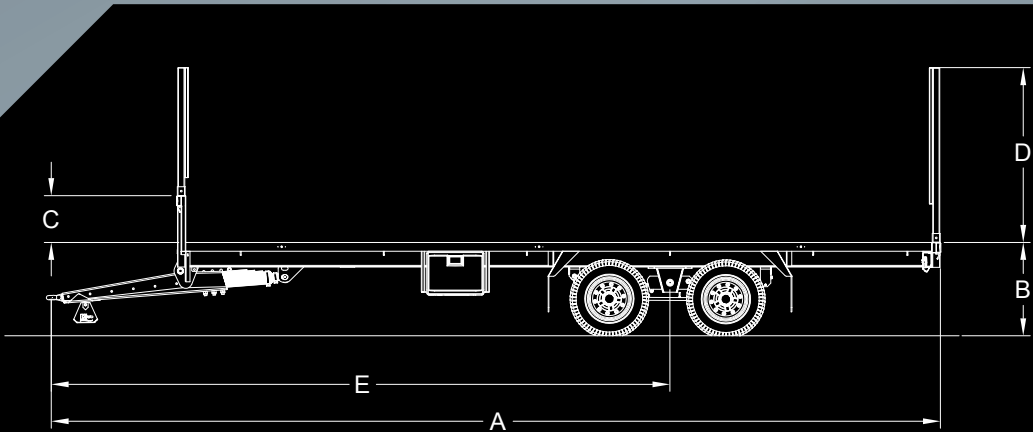

4 FT EXTENSION



SWIVEL OR SPOON HITCH



REAR FLASHING LED BEACON



SPRUNG DRAWBAR



ABS BRAKES



LADDER AND STEPS



Proline Trailers

Grain, Silage
and Bale



Quality new and used
stock available online

  @PKSalesMachinery

07734 559 696

paul@pksales.co.uk

www.pksales.co.uk

